




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/52	A1	(11) International Publication Number: WO 00/04723 (43) International Publication Date: 27 January 2000 (27.01.00)
(21) International Application Number: PCT/EP99/04933 (22) International Filing Date: 10 July 1999 (10.07.99) (30) Priority Data: 98401820.0 17 July 1998 (17.07.98) EP (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: HERRMANN, Laurent; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: LANDOUSY, Christian; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: DEVICE FOR DEMULTIPLEXING CODED DATA (57) Abstract <p>The invention relates to a device for demultiplexing coded data corresponding to multimedia objects. The data are organized in a bitstream divided into individually accessible portions – for instance Access Units for an MPEG-4 compliant bitstream – themselves subdivided into smaller data entities – SL-packets in the cited example – which all the demultiplexing operations are applied to. Said operations are mainly, for all the data received at the input of the demultiplexing device: reading and formatting of a buffer, extraction of successive Access Unit segments, progressive reconstruction of a complete Access Unit, transmission of said Access Unit to an output buffer or file.</p>		

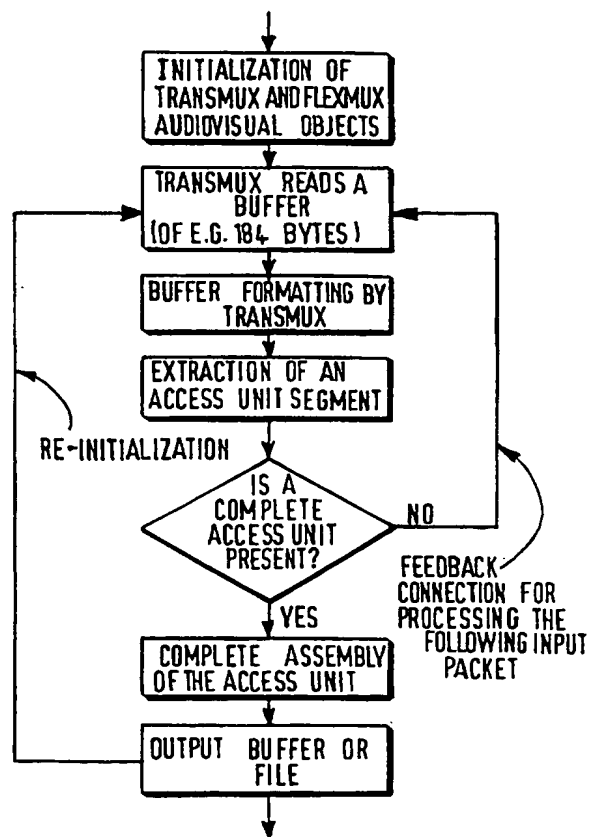

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Device for demultiplexing coded data.

he invention relates to a device for demultiplexing coded data available in the form of a bitstream corresponding to multimedia objects, and more particularly in the form of a bitstream compliant with the MPEG-4 standard.

The MPEG-4 standard provides standardized ways to represent audio-visual
5 objects (called AVOs) of natural or synthetic origin, to compose them together to create compound AVOs that form audio-visual scenes, to multiplex and synchronize the data associated with AVOs, and to interact with the audio-visual scenes generated or reconstructed at the receiver's end.

It may be recalled that, as shown in Fig.1, an audio-visual scene, received by an
10 MPEG-4 system such as described for instance in the document "MPEG-4 : context and objectives", R.Koenen and al., Signal Processing : Image Communication 9 (1997), May 1997, n°4, pp.295-304, is generally composed of several AVOs organized in a hierarchical fashion. The leaves of this hierarchical organization are primitive AVOs such as, in the case of the illustrated audiovisual presentation : a background, the picture of a talking person, the
15 voice associated with that person, a 3D object present in the scene, and so on (of any type – text, graphics,...- and which may be either bi- or tridimensional). Fig.1 also illustrates schematically how video and audio compositors process the scene before it is rendered and displayed for the user, who has then the possibility to interact with it.

The data associated with these AVOs are conveyed in one or more Elementary
20 Sstreams (ESs), characterized by the quality of service they require for transmission and some other parameters. The so-called MPEG-4 System Layer Model, schematically depicted in Fig.2, provides a common model on which all implementations of MPEG-4 terminals can be based. As shown in Fig.3 that illustrates the major components of such an MPEG-4 terminal (at the receiver side), data streams coming from a network or a storage medium
25 ("Transmission/Storage Medium", in Fig.2 ; "Network Layer", in Fig.3) in the form of TransMux Streams must be properly demultiplexed to recover the Elementary Streams. These Elementary Streams are then passed to the appropriate decoders in view of their decompression, and in order to reconstruct the original AVO (Primitive AV Objects). Decoded AVOs, along with scene description indications giving information on the composition of the

concerned scene, are then used to compose and render the scene as described by its author (in a given hierarchical, interactive form). Also to the extent allowed by the author, upstream data (user events, class request,...) are sent back to the Network Layer in order to interact with the scene.

5 More precisely, the MPEG-4 terminal depicted in Fig.2 is a multi-layer structure consisting of the three following layers : a TransMux layer 21, a FlexMux layer 22 and an Access Unit layer 23.

The TransMux layer 21, which designates any existing or future underlying multiplex functionality that is suitable to transport MPEG-4 data streams (thus allowing
10 MPEG-4 to be used in a wide variety of operation environments), consists of a protection sublayer and a multiplexing sublayer (although it may not be possible to separately identify these sublayers in some TransMux instances, the protection sublayer has a specific interest for providing error protection and error detection tools suitable for the given network or storage medium). This layer, not defined in the context of MPEG-4, is in fact an interface to the
15 network or the storage medium and allows to offer transport services matching the requested Quality of Service (QoS).

The FlexMux layer 22, completely specified by MPEG-4, consists of a flexible tool for interleaving data (one or more Elementary Streams into one FlexMux stream) and allows to identify the different channels for the data that have been multiplexed.

20 The Access Unit layer 23 allows for an identification of Access Units (video or audio frames, scene description commands,...) in Elementary Streams and a recovery of time base. It conveys therefore both time base information and time stamped Access Units of these Elementary Streams. It may however be noticed that each layer of the MPEG-4 demultiplexer of the terminal has to process successively the whole stream.

25 A first object of the invention is to propose a more general implementation of such a demultiplexer, allowing a full integration with the subsequent decoder.

To this end, the invention relates to a device such as mentioned in the preamble of the description and which is moreover characterized in that said bitstream is subdivided into individually accessible portions of the coded representation of said multimedia
30 objects and all the demultiplexing operations carried out in said device are, before the decoding operations, successively applied, after a further subdivision of said portions into smaller basic data entities, to each of said small data entities.

Another object of the invention is, more particularly, to propose a demultiplexer allowing to maintain a fully MPEG-4 compliant architecture.

To this end the invention relates to a demultiplexing device in which said bitstream is compliant with the MPEG-4 standard and subdivided into so-called Access Units, said demultiplexing operations being successively applied to smaller data segments, called SL-packets, of these Access Units.

More precisely, the main steps of the demultiplexing procedure, applied to each of the successive data structures, will then be the following ones :

- (a) reading and formatting of a buffer ;
- (b) extraction of segments of an Access Unit ;
- (c) test of complete reconstruction, or not, of an Access Unit from the previously extracted segments ;
- (d) transmission of each complete Access Unit to an output buffer or file ;
- (e) repetition of steps (a) to (d) until no more data are present at the input of the demultiplexer.

The particularities and advantages of the invention will be now explained in a more detailed manner in relation with the following description and the accompanying drawings, in which :

- Fig.1 illustrates an example of an object-based multimedia scene, as processed according to the MPEG-4 standard ;
- Fig.2 depicts an MPEG-4 terminal structure allowing to process and reconstruct an audiovisual interactive scene, after a transmission and/or a storage of the corresponding MPEG-4 coded data ;
- Fig.3 shows the major components of an MPEG-4 terminal, at the receiver side ;
- Fig.4 illustrates the steps implemented in a demultiplexing device according to the invention.

Although the invention may be applied in a wider field of applications, it will be described in the case of the MPEG-4 standard. According to the MPEG-4 specifications, representations of multimedia objects are conveyed from source entities to destination entities in separate elementary streams. A specific layer –called Synchronization Layer, or Sync Layer, or SL- allows to adapt elementary stream data for communication and therefore provides inter alia timing and synchronization information. This layer provides for an encapsulation of each elementary stream, i.e. divides each elementary stream into one or more Access Units, which are individually accessible portions of the coded representation of a multimedia object and are the smallest data entities to which timing information can be

attributed. An Access Unit may be itself divided into small basic data entities called SL-Packets each of which consists of a configurable header and a payload.

In implementations proposed up to now, each layer of an MPEG-4 demultiplexer processes successively the whole stream, such as described for instance in the European patent application n°98400160.2 (PHF98505). According to the invention, an MPEG-4 terminal with a real-time performance may be obtained if the demultiplexing operations are now processed for every piece of data the MPEG-4 demultiplexer receives. Basically, the different steps of the demultiplexing procedure are then the following ones, as depicted in Fig.4 :

- 10 (a) initialization of TransMux and FlexMux audiovisual objects ;
- (b) a buffer of a size corresponding to a payload length is read (for instance, this size may be of 184 bytes for the payload length of an MPEG-2 Transport Stream Packet) ;
- (c) said buffer (that has been read) is then formatted to a FlexMux Protocol Data Unit (FMPDU) by the TransMux layer ;
- 15 (d) the FlexMux layer receives said FMPDU and extracts the corresponding Synchronization Layer Protocol Data Unit (or SLPDU, such an SLPDU representing generally a segment of an Access Unit, as said above) ;
- (e) the next step is a test : has an Access Unit been completely reconstructed from the previous concerned SLPDU segments, or not ? :
- 20 (e1) f an Access Unit has not been completely reconstructed, the MPEG-4 demultiplexer stores the data into a local buffer and re-starts the process with another input packet ;
- (e2) f a complete Access Unit, composed of all the concerned previous
- 25 SLPDUs, is present, it is delivered to an output buffer or written into a file.

Said process is then re-initialized until no more data are present at the input of the demultiplexer.

The described demultiplexing device can be easily integrated on a programmable multimedia processor such as the processor designated with the reference TM-1000 (=TriMedia) manufactured by the company Philips, and its architecture is fully MPEG-4 compliant on said processor.

CLAIMS:

1. A device for demultiplexing coded data available in the form of a bitstream corresponding to multimedia objects, characterized in that said bitstream is subdivided into individually accessible portions of the coded representation of said multimedia objects and all the demultiplexing operations carried out in said device are, before the decoding operations,
5 successively applied, after a further subdivision of said portions into smaller basic data entities, to each of said small data entities.
2. A device according to claim 1, wherein said bitstream is compliant with the MPEG-4 standard and subdivided into so-called Access Units, said demultiplexing operations
10 being successively applied to smaller data segments, called SL-packets, of these Access Units.
3. A device according to claim 2, characterized in that said demultiplexing operations are, after an initialization of the elements of the demultiplexing device, carried out according to the following procedure :
15 (a) reading and formatting of a buffer ;
(b) extraction of segments of an Access Unit ;
(c) test of complete reconstruction, or not, of an Access Unit from the previously extracted segments ;
(d) transmission of each complete Access Unit to an output buffer or file ;
20 (e) repetition of steps (a) to (d) until no more data are present at the input of the demultiplexer.

1/4

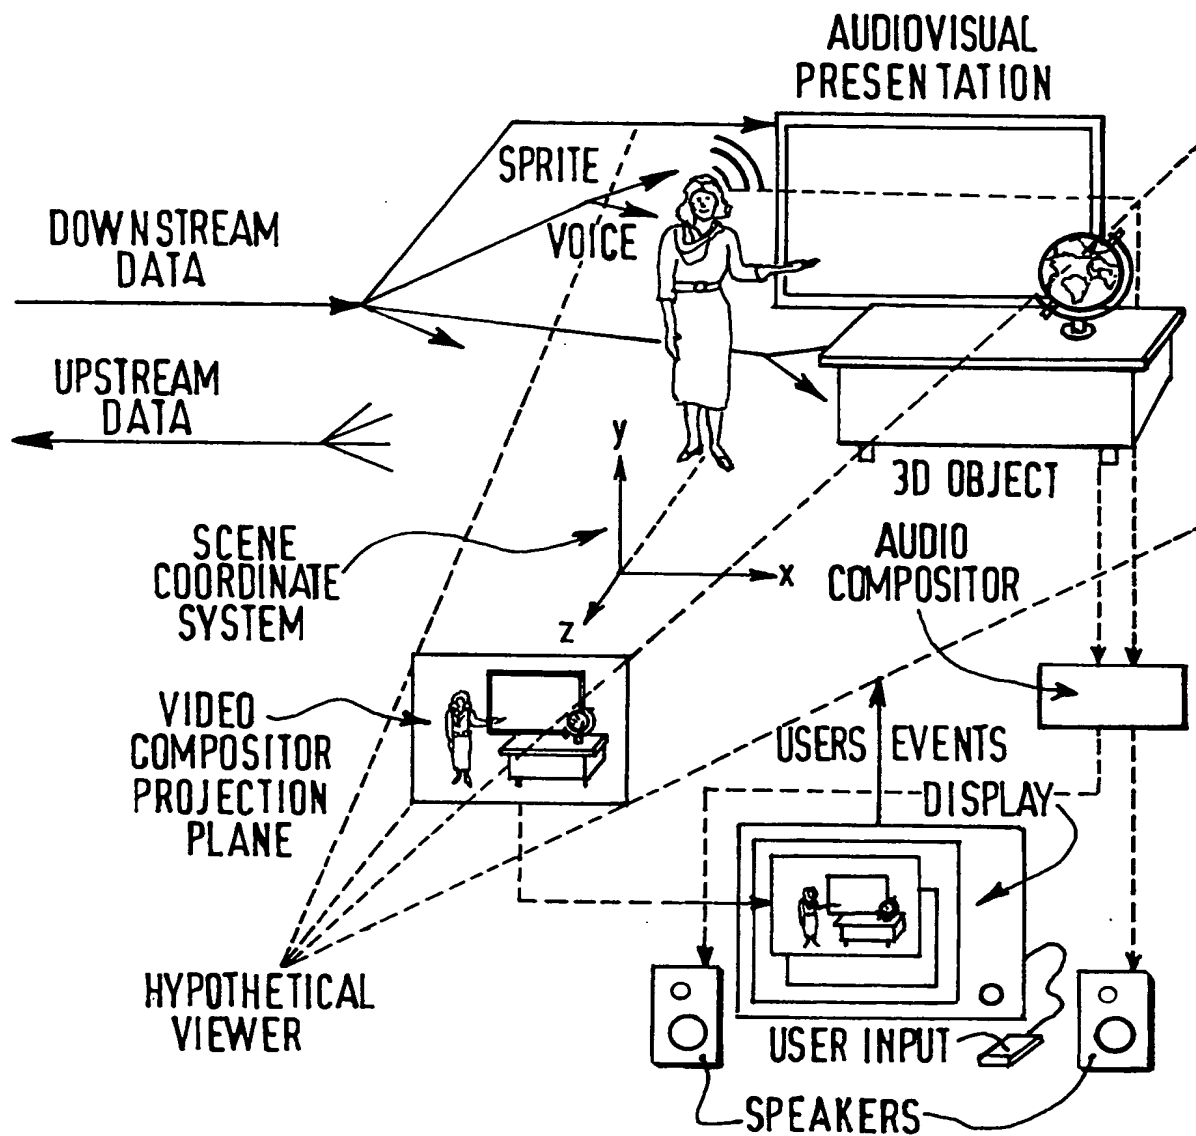


FIG.1

2/4

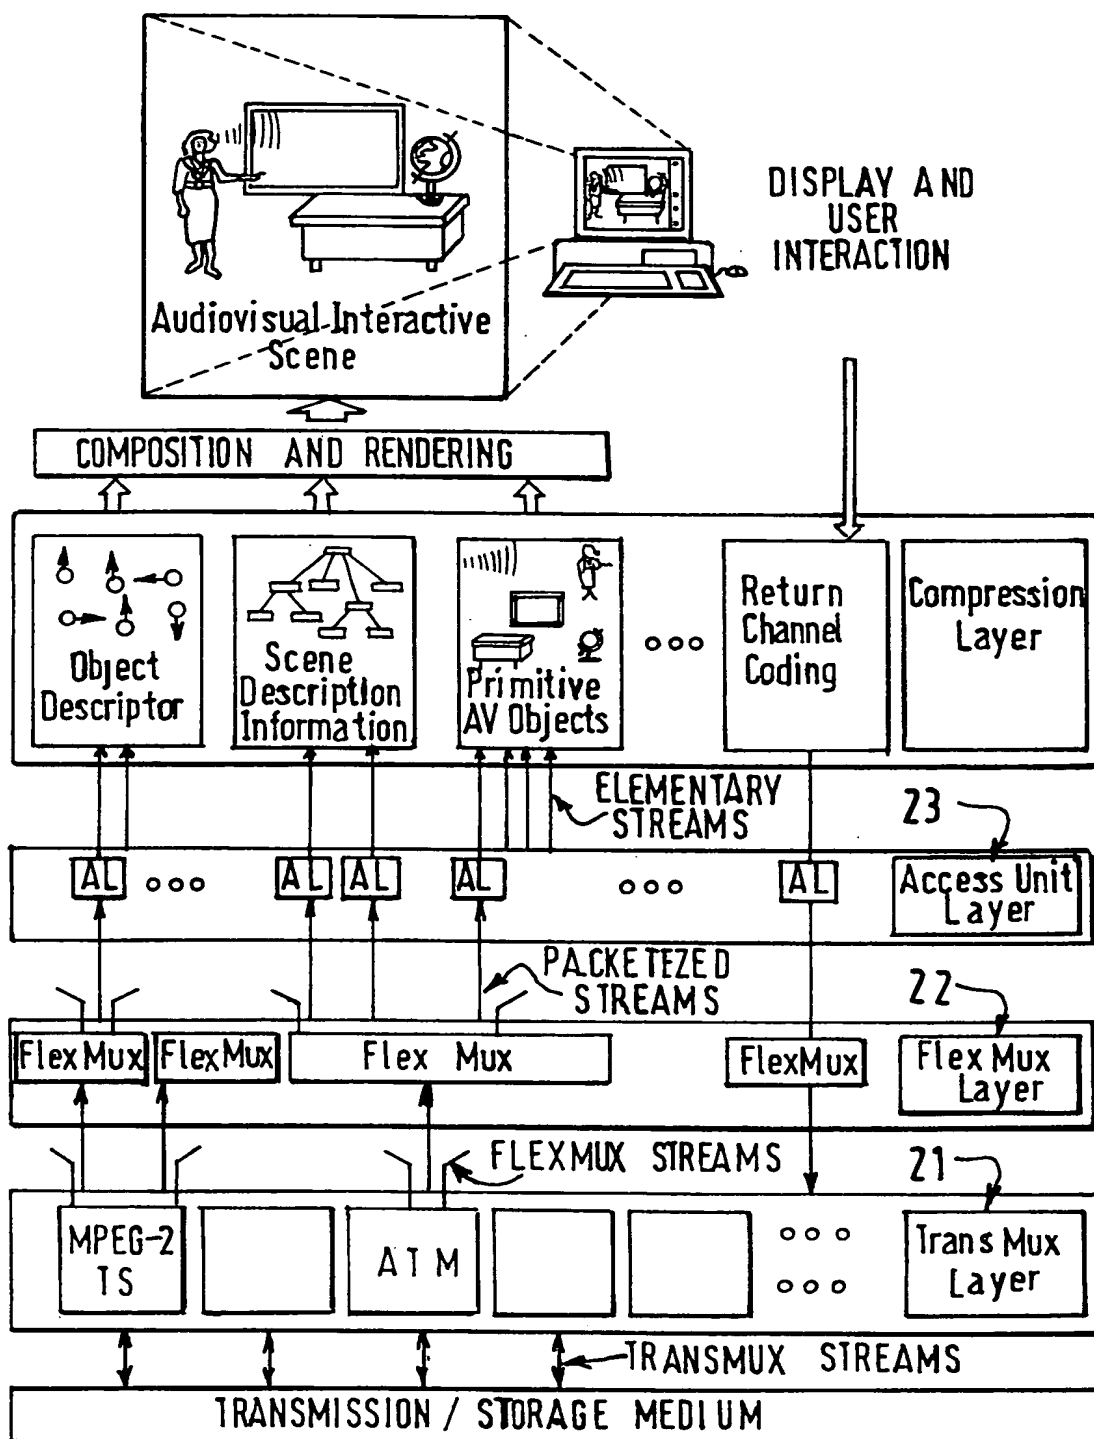


FIG.2

3/4

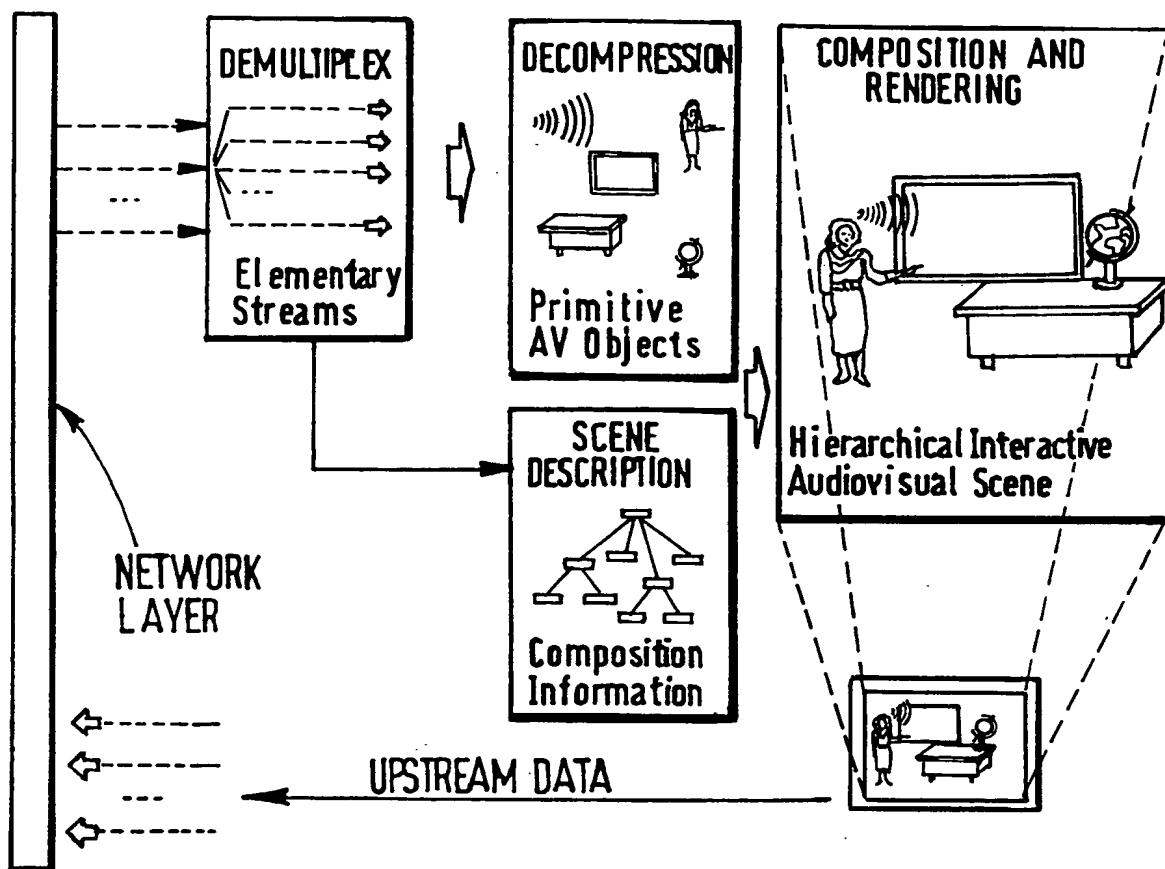


FIG.3

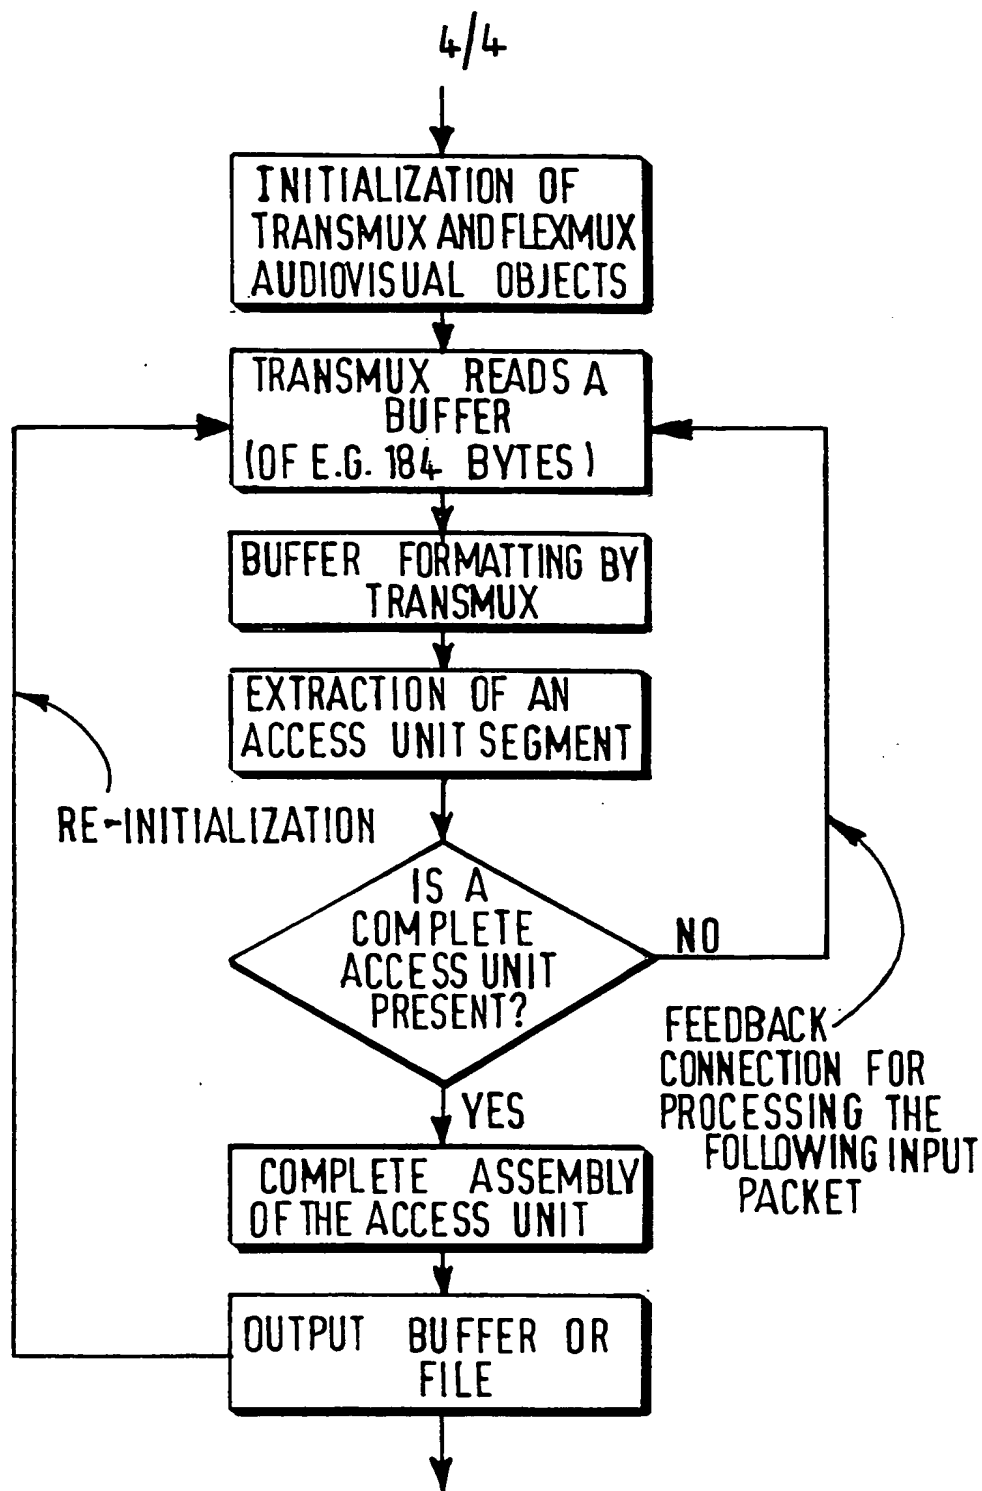


FIG.4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04933

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 10591 A (KIKUCHI YOSHIHIRO ; WATANABE TOSHIAKI (JP); NAGAI TAKESHI (JP); CHU) 12 March 1998 (1998-03-12)	1-3
P, X	-& EP 0 860 999 A (TOKYO SHIBAURA ELECTRIC CO) 26 August 1998 (1998-08-26) column 37, line 11 -column 41, line 42 figures 36-49 --- -/--	1-3



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 October 1999

Date of mailing of the international search report

05/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

La, V

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04933

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	"MPEG-4 Overview - (Dublin version)" CODING OF MOVING PICTURES AND AUDIO, vol. ISO/IEC JTC1/SC29/WG11 N2323, pages 1-55, XP002120014 July 1998, Dublin section 1.3 "Description and synchronization of streaming data for media objects"	1,2
A	section 1.4 "Delivery of streaming data" Introduction of section 2 "Detailed technical description of the MPEG-4 standard" and section 2.2 "Demultiplexing, synchronization and description of streaming data"	3
X	--- AVARO O., HERPEL C., SIGNÈS J.: "MPEG-4 systems, Overview and architecture" , 'Online! 28 May 1998 (1998-05-28), XP002120015 Retrieved from the Internet: <URL:http://garuda.imag.fr/MPEG4/syssite/s yspub/docs/tutorial/> 'retrieved on 1999-10-22! slide "MPEG-4 Standard structure" slides "Version 1 Tools" slide "Elements" slide "Synchronization" slides "Synchronization layer" slides under "Delivery of MPEG-4 content" : "Delivery framework", "TransMux layer", "Wrapping of Sync. layer packets", "FlexMux tool", "Modes of the FlexMux tool"	1,2
A		3
X	--- EP 0 753 954 A (GEN INSTRUMENT CORP) 15 January 1997 (1997-01-15) page 3, line 3 - line 16 page 8, line 21 - line 24	1
A	figures 1,4	2,3
P,X	--- WO 99 21337 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS AB (SE)) 29 April 1999 (1999-04-29)	1,2
P,A	the whole document	3
	--- -/--	

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04933

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"MPEG Systems (1-2-4-7) FAQ, Version 5.1" CODING OF MOVING PICTURES AND AUDIO, 'Online! vol. ISO/IEC JTC1/SC29/WG11 M3517, 6 - 10 July 1998, XP002120016 Retrieved from the Internet: <URL:HTTP://GARUDA.IMAG.FR/MPEG4/SYSSITE/S YSPUB/> 'retrieved on 1999-10-22! section "MPEG-4 systems" -----</p>	1-3
A	<p>AVARO O ET AL: "The MPEG-4 systems and description languages: A way ahead in audio visual information representation" SIGNAL PROCESSING. IMAGE COMMUNICATION, vol. 9, no. 4, 1 May 1997 (1997-05-01), page 385-431 XP004075337 ISSN: 0923-5965 section 6 "Synchronization and multiplexing - managing time" figures 11,12 -----</p>	1-3

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04933

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9810591 A	12-03-1998	JP 11074868 A	16-03-1999
		AU 4033197 A	26-03-1998
		CA 2236411 A	12-03-1998
		CN 1200223 A	25-11-1998
		EP 0860999 A	26-08-1999
		NO 981976 A	02-07-1998
<hr/>			
EP 0753954 A	15-01-1997	US 5598415 A	28-01-1997
		AU 701138 B	21-01-1999
		AU 5835496 A	23-01-1997
		CA 2181194 A	14-01-1997
		CN 1152825 A	25-06-1997
		JP 9135443 A	20-05-1997
		NO 962910 A	14-01-1997
		US 5742623 A	21-04-1998
<hr/>			
WO 9921337 A	29-04-1999	NONE	
<hr/>			

THIS PAGE IS BLANK